

## Trim Tab Actuators Extended Length




Lectrotab is excited to introduce a new line of longer stroke length actuators. Lectrotab trim tab actuators are precision-engineered to combine quiet operation with a non-hydraulic, maintenance free design. The unit is corrosion free, ensures very accurate tab positioning, provides maximum lift force, and is totally self-contained for easy installation. The actuator assembly is packaged in a non-metallic permanently sealed housing. No components need to be installed inside the boat. Most importantly, unlike hydraulic trim tabs, there is no oil to leak out. The actuator incorporates either a standard or low profile transom mounting bracket. Actuators available in 12 and 24 VDC.

### FEATURES

- Available in 4" (102mm) and 3.5" (89mm) stroke lengths
- Upper ram seal location cannot be damaged due to fouled ram or barnacle growth
- Utilizes internal pressure equalization system
- Upgrades to most popular hydraulic and electromechanical systems
- Internal brake system prevents unwanted tab movement when under way or backing down
- Quiet operation
- All actuators fully load tested to push 1000 lbs of force
- Non-metallic external structure which cannot corrode and will not deteriorate in the sun or under water

# TRIM TAB ACTUATOR DIMENSTIONS EXTENDED LENGTH

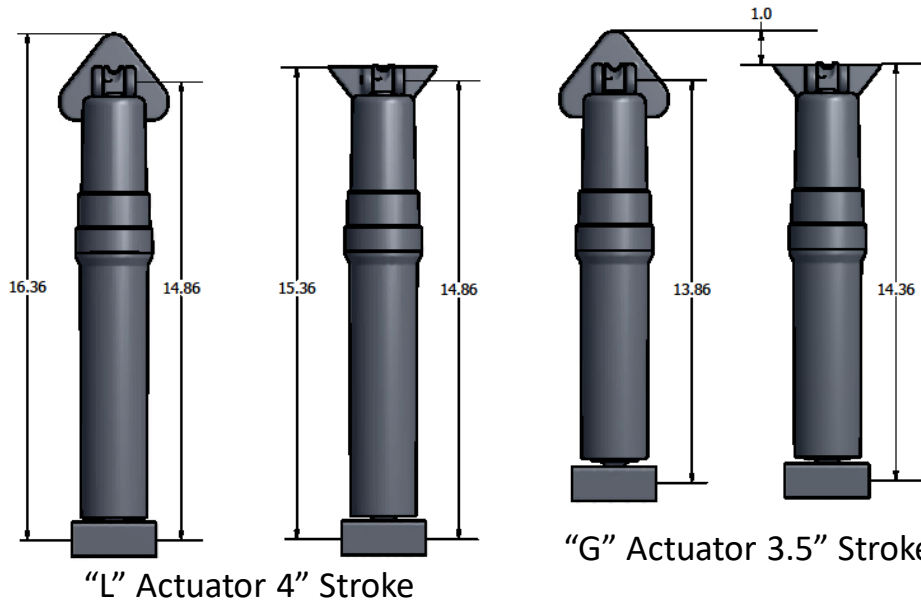

## SPECIFICATIONS 4" STROKE

Model	DC Voltage	Stroke Length	Stroke Speed	Distance from Bolt to Pin	Cable Length (Feet/Meter)	Upper Mounting Bracket	Lower Mounting Bracket	Use Actuator w/ Tabs
L	12VDC	4"/ 102mm	7 sec.	14.86"/377mm	6'/1.8m	None	None	All Tabs
L-BK	12VDC	4"/102mm	7 sec.	14.86"/377mm	6'/1.8m	Standard	Standard	All Tabs
L-BK-13	12VDC	4"/ 102mm	7 sec.	14.86"/377mm	23'/7m	Standard	Standard	All Tabs
L-BK-24	12VDC	4"/ 102mm	7 sec.	14.86"/377mm	28'/8.5m	Standard	Standard	All Tabs
L-BK-25	12VDC	4"/ 102mm	7 sec.	14.86"/377mm	6'/1.8m	Low Profile	Standard	All Tabs
L-BK-16	12VDC	4"/ 102mm	7 sec.	14.86"/377mm	23'/7m	Low Profile	Standard	All Tabs

## SPECIFICATIONS 3.5" STROKE

G	12VDC	3.5"/ 89mm	6 sec.	13.86"/352mm	6'/1.8m	None	None	All Tabs
G-BK	12VDC	3.5"/ 89mm	6 sec.	13.86"/352mm	6'/1.8m	Standard	Standard	All Tabs
G-BK-13	12VDC	3.5"/ 89mm	6 sec.	13.86"/352mm	23'/7m	Standard	Standard	All Tabs
G-BK-24	12VDC	3.5"/ 89mm	6 sec.	13.86"/352mm	28'/8.5m	Standard	Standard	All Tabs
G-BK-25	12VDC	3.5"/89mm	6 sec.	13.86"/352mm	6'/1.8m	Low Profile	Standard	All Tabs
G-BK-16	12VDC	3.5"/ 89mm	6 sec.	13.86"/352mm	23'/7m	Low Profile	Standard	All Tabs