



# Stainless Steel Trim Tabs




The Lectrotab stainless steel trim tab design provides unmatched strength and reliability. All stainless steel tabs are fabricated with a continuous rolled and pinned hinge. This design eliminates the need for welding. The tabs are made of corrosion resistant 12 gauge, 304 stainless steel and are available in standard finish (as shown), mirror finished stainless steel, or black powder coated stainless steel. Standard tabs are available in 9" (23cm) and 12" (30cm) chord lengths (chord is the length from the transom to the tab trailing edge) and in widths between 9" (23cm) and 48" (122cm). See specification chart for dimensional details. All tabs exceeding a 24" (61cm) width feature a 90 degree bent up trailing edge for additional strength. Edges can be turned up or down, made straight or tapered, and reinforced in any way. For galvanic protection, pre-installed zinc anodes are also available.

Lectrotab specializes in providing customized tab designs. Please contact Lectrotab for your specific tab needs.

## FEATURES

- Strong, corrosion resistant 12 gauge, 304 stainless steel
- Continuous rolled and pinned hinge provides added strength and eliminates the need for welding
- Standard chord lengths available in 9" (23cm) and 12" (30cm) and widths from 9" (23cm) to 48" (122cm)
- Custom chord lengths and widths are also available
- Dual actuator mounting available
- Black powder coated finish or mirror finish available
- Zinc anodes may be installed for additional galvanic corrosion resistance
- Bent trailing edge standard for tabs exceeding 24" width
- Includes carriage bolts and nuts for actuator mounting to tab

# STAINLESS STEEL TAB DIMENSTIONS

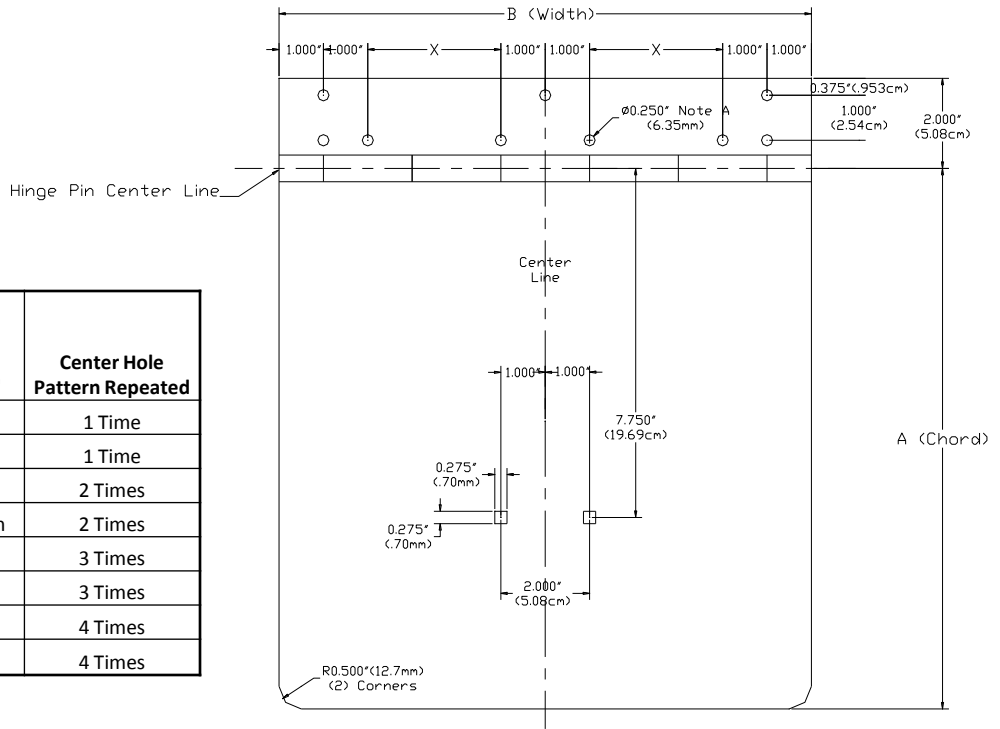

Tab Width "B"	Dimension "X"	Center Hole Pattern Repeated
9"/23cm	1.5"/38.1mm	1 Time
12"/30cm	3"/76.2mm	1 Time
18"/46cm	3.33"/84.5mm	2 Times
24"/61cm	5.33"/135.4mm	2 Times
30"/76cm	5"/127mm	3 Times
36"/91cm	6.5"/165.1mm	3 Times
42"/107cm	6"/152.4mm	4 Times
48"/122cm	7"/177.8mm	4 Times

## FLAT STAINLESS STEEL TAB MODEL IDENTIFICATION

T

12

X

12

T = Stainless Steel  
12 gauge

1st Number (A) = Tab Chord  
Length (inches)

2nd Number (B) = Tab Width Across  
Transom (inches)

## SPECIFICATIONS

Model Number	Stainless Steel Gauge	Tab Size		Typical Boat Length	
		Inches	cm	Feet	Meters
T9X9	12	9x9	23x23	14'-19'	4.0m-6.0m
T9X12	12	9x12	23x30	16'-25'	5.0m-7.5m
T9x18	12	9x18	23x46	21'-30'	6.5m-9.0m
T9x24	12	9x24	23x61	24'-37'	7.0m-11.0m
T9x30	12	9x30	23x76	30'-45'	9.0m-13.5m
T9x36	12	9x36	23x91	35'-54'	10.5m-16.5m
T12x9	12	12x9	30x23	18'-29'	5.5m-8.5m
T12x12	12	12x12	30x30	18'-32'	5.5m-9.5m
T12x18	12	12x18	30x46	20'-40'	6.0m-12.0m
T12x24	12	12x24	30x61	28'-48'	8.5m-14.5m
T12x30	12	12x30	30x76	30'-55'	9.0m-16.5m
T12x36	12	12x36	30x91	34'-60'	10.0m-18.0m
T12x42	12	12x42	30x107	50'-70'	15.0m-21.0m
T12x48	12	12x48	30x122	60' +	18.0m +

Linear Devices Corporation  
8790 Park Central Drive, Richmond, VA 23772  
[www.lectrotab.com](http://www.lectrotab.com), Ph 804-261-3888, Fax 804-264-3070  
January 2011

**LECTROTAB**